

EFXP Series

Explosion-proof exit signs



EFXPW – Wall mount



XPP – Adjustable pendant mount



EFXPC – Ceiling mount



Construction

- Heavy-duty 20 gauge steel, baked enamel grey finish
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons

Mounting

- Ceiling, wall or pendant
- 3/4 inch conduit entry

Approvals


- CSA-US (to UL 924 standards)
- Class I, Division 1&2, Groups C and D
- Class II, Division 1&2, Groups E, F and G
- Class III
- Complies with NEC, OSHA and NEMA for above classes and groups
- Suitable for wet and damp location
- Temperature code T6

Warranty

- Unit has a five-year warranty
- Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf

Transfer panel (to order separately with AC/DC exit signs)


- A transfer panel is only required for AC/DC hazardous location **EFXP** exit signs that are under constant operation as required by code. Transfer panels are not designed to be installed/mounted in a hazardous or explosive area. Transfer panels are to be mounted remotely from these types of areas.
- Transfer panel available for up to 100W
- To order a transfer panel the following information is required:
 - 1) AC input: 120V or 277V
 - 2) DC voltage
 - 3) The total load wattage of all EFXP lamp(s) to be supplied by transfer panel

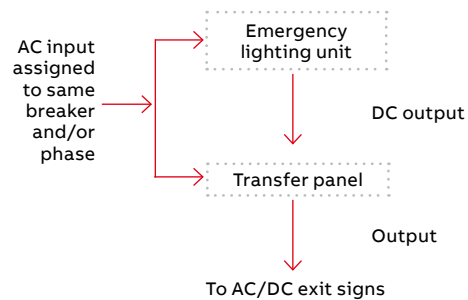

Dimensions

Dimensions are approximate and subject to change.

AC-only and AC/DC exit signs

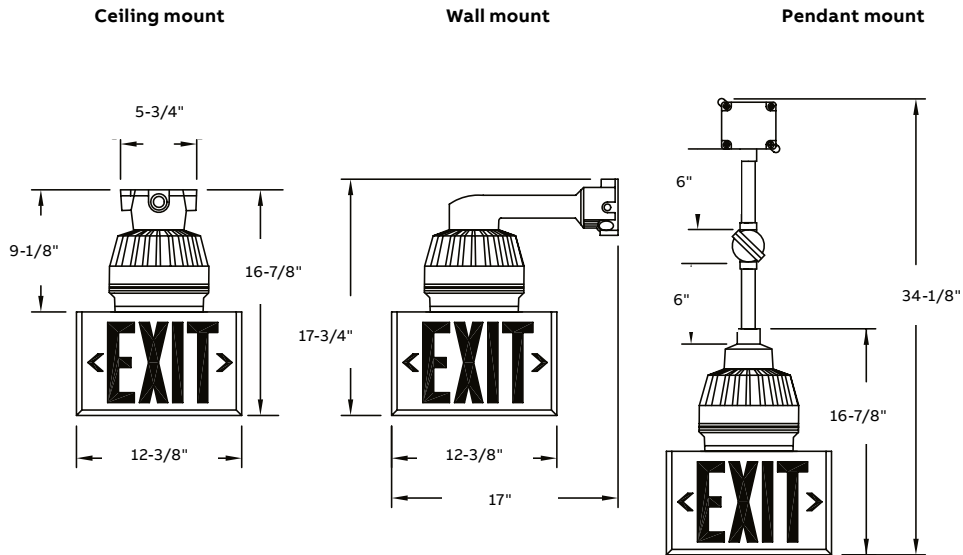

Power consumption

120/277VAC, 60Hz maximum 0.3/0.15A

How to order

Series	Mounting	Lamp	Faces	Legend color
EFXP= Exit series	C= Ceiling mount P= Pendant W= Wall	LED6= 6V-3 watt LED LED12= 12V-3 watt LED LED24= 24V-3 watt LED LED120= 120V-5 watt LED	1= Single face 2= Double face	R= Red G= Green

Example: EFXPCLED61R

How to order – Transfer panel (required for the operation of AC/DC exit sign)

AC voltage	DC voltage	Series	Watts
120= 120V AC	-6= 6V DC ¹	-TS	-25= 25W
277= 277V AC	-12= 12V DC		-50= 50W
	-24= 24V DC		-75= 75W
			-100= 100W

Example: Transfer panel (needed for AC/DC operation): 120-12-TS-25

¹50W maximum