

Preceptor™ Series

Die-cast aluminum LED exit sign



Construction

- Die-cast aluminum housing
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-box mounting

Special wording panels:

- Available. Contact your sales representative with your design requirements

Power consumption

Model	AC specs		DC specs	
AC-only	120/277VAC, 60 Hz	Less than 2.5W	-	-
AC/DC-remote	120/277VAC, 60 Hz	Less than 2W	6 to 48VDC	Less than 1.5W
Self-powered	120/277VAC, 60 Hz	Less than 3W	Ni-Cd battery	Min. 90 minutes
Self-powered with diagnostic	120/277VAC, 60 Hz	Less than 2.8W	Ni-Cd battery	Min. 90 minutes

Housing color



Black



White



Brushed aluminum

How to order

Housing color	Series/models	# of faces	Legend color	Options
BA = Black body/aluminum face	P = AC only (120/277 volts)	1 = Single face	R = Red	Blank = No options
WW = White body/white face	P2C1 = Dual AC circuit (2 x 120V)	2 = Double face	G = Green	DL = Damp location
WA = White body/aluminum face	P2C2 = Dual AC circuit (2 x 277V)			FA = Fire alarm activated flasher (Not available with PDN)
BB = Black body/black face	PU = 120/277VAC & 6 to 48VDC			FBF = Flasher buzzer + fire alarm activated flasher ²
AA = Brushed aluminum body and face	PDN = Self-powered, No Advanced Diagnostics		Open face ¹	FL = Flasher ²
	PXN = Self-powered Advanced Diagnostics		RW = Red on white	FZ = Flasher buzzer ²
	PNEX = Nexus® wired (contact your sales representative)		GW = Green on white	VR = Tamper-proof screws
	PNEXRF = NEXUS® wireless (contact your sales representative)			VR1 = Polycarbonate shield with tamper-proof screws

Example: BAPU2R

Electronics

- Optional Advanced Diagnostics
- Optional Nexus® monitoring system
- 120/277 60Hz
- Compatible with Emergi-Lite Mini Inverters (contact your sales representative for more information)

Approvals


- UL 924 listed
- Damp location optional (50°F to 104°F)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Warranty

- Unit has a five-year limited warranty
- Detailed warranty terms located on page 202 or online at: www.emerigi-lite.com/usa/files/EL_Warranty.pdf

Dimensions

Dimensions are approximate and subject to change.

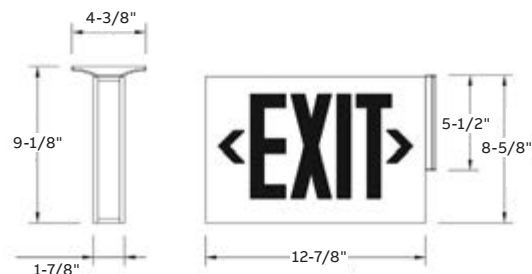

¹Note: Open face required with special wording legends

²PXN, PNEX and PNEXFR models only