

# Preceptor™ Recessed Series

Die-cast LED exit sign



### Construction

- Die-cast aluminum faceplate
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

### Mounting

- Fully recessed mount

### Electronics

- Standard Advanced Diagnostics (self-powered models)
- 120/277 60Hz

### Special wording panels:

- Available. Contact your sales representative with your design requirements

### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards


### Warranty

- Unit has a five-year limited warranty
- Detailed warranty terms located on page 178 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Power consumption


Model	AC specs		DC specs	
AC-only	120/277VAC	1.4W	-	-
Self-powered	120/277VAC	1.7W	Ni-Cd battery	Min. 90 minutes

### Housing color

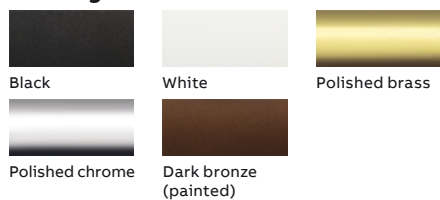

### Dimensions

Dimensions are approximate and subject to change.

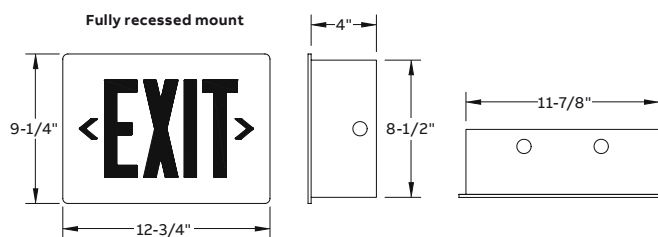

### How to order

Recessed	Face color	Series	# of faces
FR= Fully recessed	Blank= Aluminum face B= Black face W= White face PB= Polished brass face CH= Polished chrome face BZ= Dark bronze face	LEDP= AC only LEDPXN= Self-powered Ni-Cd	1= Single face
Legend color		Options	Version
R= Red	G= Green	DL= Damp location	-N= New design
RW= Red on white (open face)	GW= Green on white (open face)	FA= Fire alarm activated flasher (self-powered)	
		FZ= Flasher buzzer (self-powered)	
		VR= Vandal-resistant screws	
		VR1= Polycarbonate shield with tamper-proof screws	
		-2CKT= Dual circuit operation (AC models only)	

Example: FRBLEDP1R-VR1-N