

## CPN6 Series

Extruded aluminum edge-lit combo



### Construction

- Extruded aluminum housing and trim plate
- Brushed aluminum finish
- Trim plate includes two fully tool-free adjustable, 2.5W LED heads, 400 Lumens each
- Acrylic panel featuring 6 inch silk-screened EXIT legend with field selectable chevrons
- Single face red or green on clear, double face red or green on mirror

### Mounting

- Wall and ceiling surface and recessed mount
- Universal mounting on wall or ceiling, for surface or recessed applications
- Adjustable bar hanger included for recessed applications

### Electronics

- High temperature long life Nickel Metal Hydride battery provides 90 minutes of emergency operation
- 120/277VAC 60Hz
- Optional: Self-Diagnostics

### Approvals

- UL 924 listed
- Damp location 41°F to 104°F (5°C to 40°C)

### Warranty


- Unit has a three-year limited warranty

Detailed warranty terms located online at:

[www.emergi-lite.com](http://www.emergi-lite.com)

### Photometric performance


Series	Spacing center-to-center (feet)	7.5' mounting height
CPN*6		30'

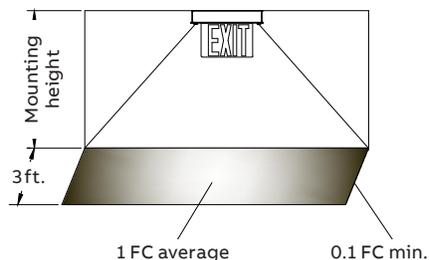


**Dimensions**

Dimensions are approximate and subject to change.


Surface ceiling mount

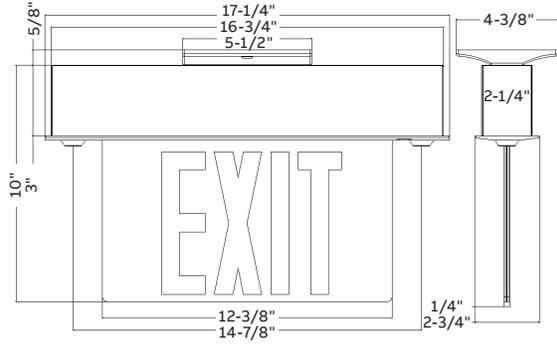


Surface wall mount

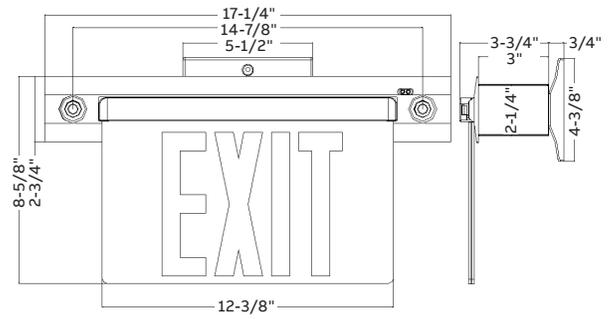

Recessed ceiling mount

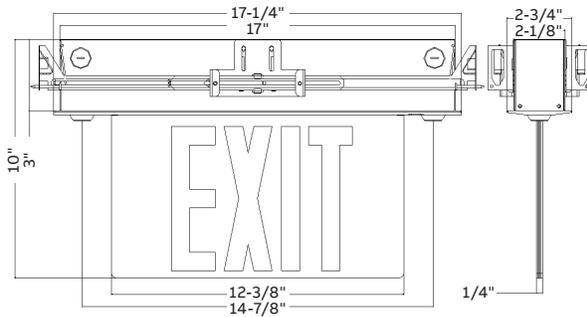

Recessed wall mount

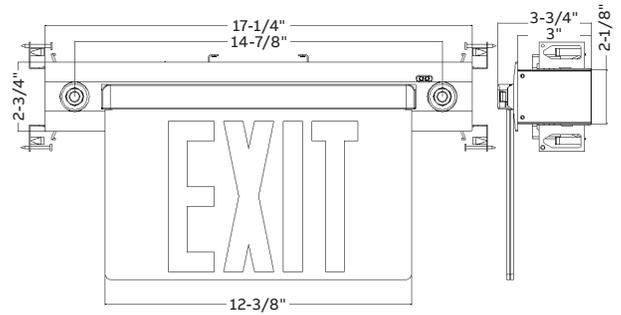

**Power consumption**

Series	AC input	Voltage	Battery
CPNR6-2HO	120/277VAC, 60Hz	3.6V	NiHM 1800mAH
CPNG6-2HO			NiHM 1800mAH
CPNR6-2HO-AD			NiHM 2500mAH
CPNG6-2HO-AD			NiHM 2500mAH

**How to order**

Model	Series	Legend color	Legend	Heads	Options
C = Combo	PN = Self-powered	R = Red G = Green	6 = 6" EXIT single and double face with universal chevrons and mounting for surface or recessed	2HO = Two high output LED heads	Blank = Standard AD = Self-Diagnostics

**Example: CPNR6-2HO-AD**