

Literay™ Series

Wall mount remote head for damp and wet locations



Description

- Indoor or outdoor use
- Die-cast aluminum construction
- Fully gasketed cover
- Impact- and tamper-resistant polycarbonate lens

Mounting

- Surface wall mount
- Universal J-box mounting

Lamp type

- Choice of MR16 LED lamp wattages

Approval


- UL 924 listed
- NEMA-3R
- Damp and wet location listed (50°F to 104°F, 10°C to 40°C)

Warranty

- Unit has a three-year limited warranty
Detailed warranty terms located on page 178 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf


Dimensions

Dimensions are approximate and subject to change.

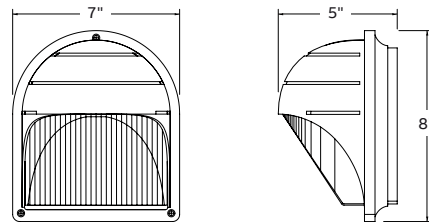


Photometric performance

Lamp	Spacing center-to-center (feet)	7 ft. mounting height
LG frosted lens		16'
LG clear lens		28'

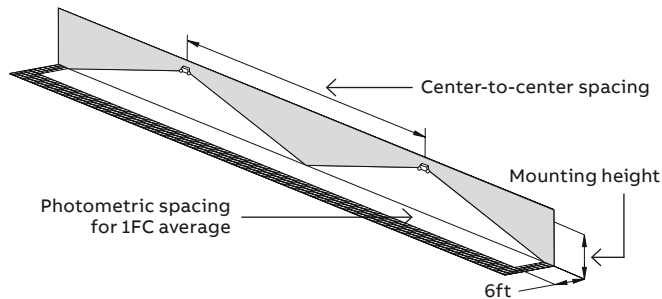

Housing color



How to order

Series	No. of lamps	Lamp type/ Wattage	Color	Options
LITE=	-2= 2 lamps	(LA)= 6V-4W,	-WT= White	Blank= No
Exterior	(standard)	MR16 LED	-BK= Black	options
remote		(LG)= 12V-4W,	-DG= Dark	-VR= Vandal-
		MR16 LED	gray	resistant
		(LI)= 12V-5W,	-BZ= Dark	screws
		MR16 LED	bronze	-N= Clear lens
		(LJ)= 12V-6W,		
		MR16 LED		
		(LL)= 24V-4W,		
		MR16 LED		
		(LV)=120V-4W,		
		MR16 LED		

Example: LITE-2(LA)-WT-VR