

## Distinction™ Remote Recessed Series

Remote recessed designer light fixtures



### Description

- Indoor use
- Powder-coated die-cast aluminum construction

### Finish

- Choice of white, black, brushed nickel

### Mounting

- Recessed ceiling mount
- Must order appropriate housing with decorative head selection for installation into new construction ceiling (EL-GRHR03) or non-insulated ceiling (EL-GRHR05) GU10 or insulated ceiling (EL-GRHR06)

### Approval

- UL listed


### Warranty

- Unit has a three-year limited warranty  
Detailed warranty terms located on page 178 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)



### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7' mounting height	15' mounting height
LA	43'	36'
LG	55'	43'
LI	71'	56'
LJ	100'	85'
LL	56'	44'

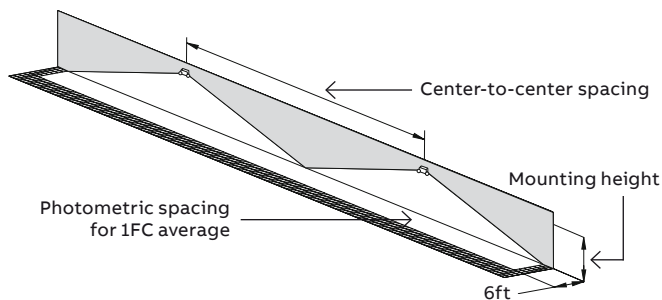








### Housing

Suffix	Description
EL-GRHR03	New construction
EL-GRHR04	Renovation housing
EL-GRH05	Non-insulated ceiling
EL-GRHR06	Insulated ceilings

### Dimensions

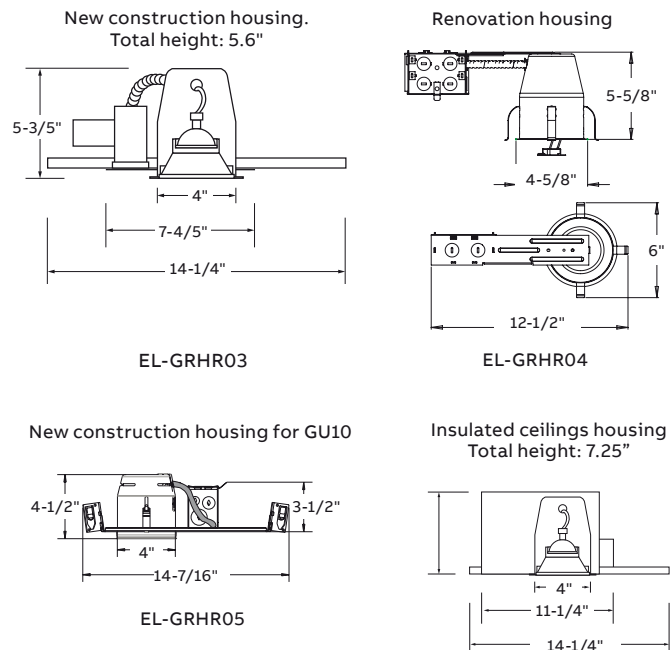Dimensions are approximate and subject to change.



Series			LED lamp suffix
	<b>EFR8R: concave</b> (egress/regress)	<b>Description:</b> Decorative adjustable lighting head <b>Dimensions:</b> 4.0" diameter base <b>Color suffix:</b> -WH = White, -BN = Brushed nickel or -BK= Black <b>Requires recessed housing</b>	<b>LA=</b> 6V-4W, MR16 LED <b>LI=</b> 12V-5W, MR16 LED <b>LJ=</b> 12V-6W, MR16 LED <b>LM=</b> 24V-6W, MR16 LED <b>LG=</b> 12V-4W, MR16 LED <b>LL=</b> 24V-4W, MR16 LED <b>LV=</b> 120V-4W, MR16 LED
	<b>EFR9: pop-out</b>	<b>Description:</b> Decorative adjustable lighting head <b>Dimensions:</b> 4.0" diameter base <b>Color suffix:</b> -WH = White or -BK= Black <b>Requires recessed housing</b>	<b>LA=</b> 6V-4W, MR16 LED <b>LI=</b> 12V-5W, MR16 LED <b>LJ=</b> 12V-6W, MR16 LED <b>LM=</b> 24V-6W, MR16 LED <b>LG=</b> 12V-4W, MR16 LED <b>LL=</b> 24V-4W, MR16 LED <b>LV=</b> 120V-4W, MR16 LED
	<b>EL-GRHR03</b>	<b>Housing enclosure</b> <b>Description:</b> New construction housing <b>Dimensions:</b> 5.6" x 14.2" <b>New construction housing – MR16 6-24V</b>	-
	<b>EL-GRHR04</b>	<b>Housing enclosure</b> <b>Description:</b> Renovating Housing <b>Dimensions:</b> 4.6" x 12.5" <b>Renovation housing - MR16 6-24V</b>	-
	<b>EL-GRHR05</b>	<b>Housing enclosure</b> <b>Description:</b> New construction housing <b>Dimensions:</b> 5.6" x 14.24" <b>New construction housing – MR16 120V (GU10)</b>  Note: For MR16 halogen lamps, please consult lamp data p. 140-141	-
	<b>EL-GRHR06</b>	<b>Housing enclosure</b> <b>Description:</b> Insulated ceilings housing <b>Dimensions:</b> 7.25" x 14.24" <b>Insulated ceilings housing – MR16 6-24V</b>	-

**How to order**

Series	Color	Lamp type/ wattage
EFR8R	Choose color from the above table	-(L_)= LED MR16
EFR9WH		

Example: EFR8R-BK-(LA)