

## Prestige™ Edge-Lit Series

Premium die-cast aluminum exit sign



### Construction

- Housing, trim plate, trim ring and canopy made of die-cast aluminum
- U-shaped clear acrylic Legend panel features laser-etched letters and chevrons
- 6 inch EXIT lettering legend, available in red or green
- 8 inch EXIT lettering legend, available in red
- Choice of finishes: white, black or brushed aluminum, polished brass, polished chrome or bronze

### Mounting

- Modular design allows for surface or recessed mount
- Canopy included for surface wall, end or ceiling mount applications
- Trim ring included for recessed wall or ceiling mount applications.
- Housing provided with conduit knock-out 1/2", top, back and end
- (C) circular or (A) angular trim plate used for surface or recessed wall or ceiling mount applications
- Hanger bars included for lay-in installation in T-bar grid

### Special wording panels

- Available. Contact your sales representative with your design requirements

### Electronics

- Optional Advanced Diagnostics
- Optional Nexus® monitoring system
- 120-277 50/60Hz


### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20


### Warranty

- Unit has a five-year limited warranty  
Detailed warranty terms located on page 202 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Mounting configurations

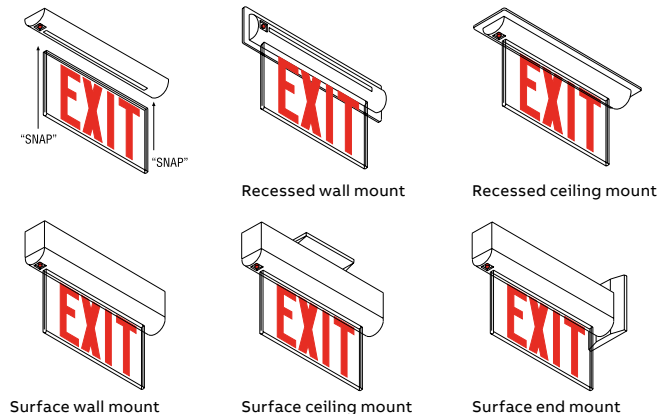


### Trim plates




Circular trim plate

Angular trim plate

### Recessed models

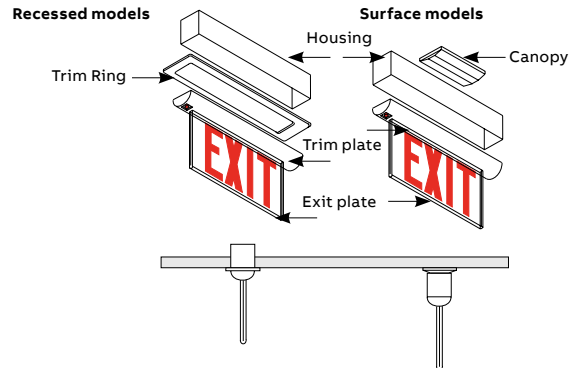


### Arrow (chevron) designation




Wording and chevrons not to scale. For illustration purposes only.

### Housing color

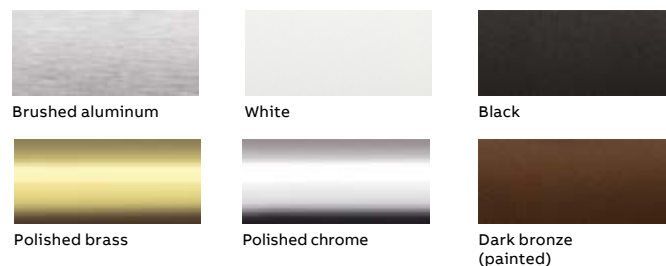

**Dimensions**

Dimensions are approximate and subject to change.

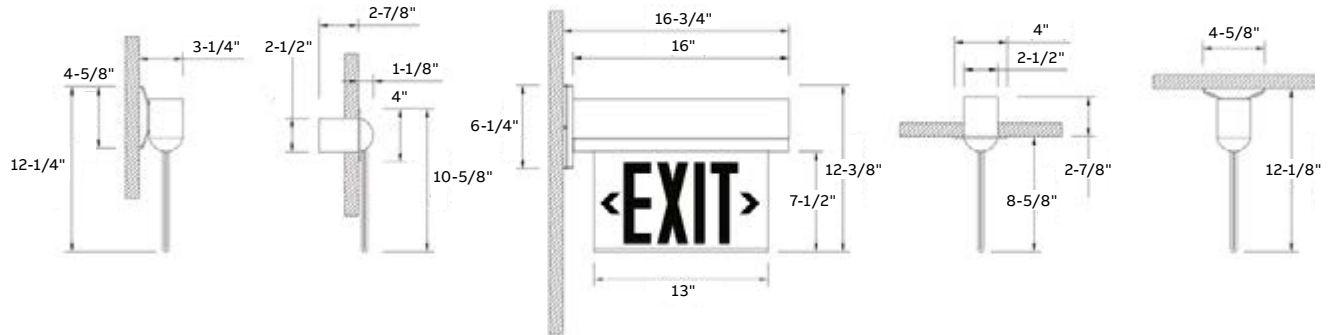

**Power consumption**

Model		AC specs		DC specs
AC-only	120 to 277VAC, 50/60Hz	Less than 1.4W	-	-
AC/DC-remote	120 to 277VAC, 50/60Hz	Less than 1.4W	6 to 24VDC	Less than 1.4W
Self-powered	120 to 277VAC, 50/60Hz	Less than 2.3W	Ni-Cd battery	Min. 90 minutes
Self-powered diagnostic	120/277VAC, 50/60Hz	Less than 2.3W	Ni-Cd battery	Min. 90 minutes

**Accessories** (order as a separate item)

Description	Suffix <sup>1</sup>
White pendant	P*-WT
Black pendant	P*-BK
Gray pendant	P*-GY

<sup>1</sup>Custom pendant lengths and colors available, specify (12", 24", 36", etc.)

**How to order**

Housing color	Series	Faces	Designation	Legend color	Background color	Arrows
<b>Blank</b> = Brushed aluminum	<b>LX</b> = AC-only <b>LXN</b> = Self-powered	<b>1</b> = Single face <b>2</b> = Double face	<b>N</b> = New design	<b>R</b> = Red <b>G</b> = Green	<b>C</b> = Clear (single face only) <b>W</b> = White <b>M</b> = Mirror	<b>Blank</b> = No arrow <b>D</b> = Double arrow <b>L</b> = Arrow left <b>R</b> = Arrow right <b>RL</b> = Right & left (double face) <b>UA</b> = Universal field installed arrows
<b>W</b> = White <b>B</b> = Black <b>PB</b> = Polished brass <b>CH</b> = Polished chrome <b>BR</b> = Bronze						
Trim	Mounting	Options	Legend size			
<b>-C</b> = Circular <b>-A</b> = Angular	<b>Blank</b> = Universal mount	<b>Blank</b> = No option <b>-NEX</b> = Nexus® wired <sup>1</sup> (consult your sales representative) <b>-NEXRF</b> = Nexus® wireless <sup>1</sup> (consult your sales representative) <b>-D</b> = Self-test and diagnostic <sup>1</sup> <b>-DC</b> = AC/DC remote 6-24 VDC <b>-FA</b> = Fire alarm <sup>1</sup> <b>-FZ</b> = Flasher & buzzer <sup>1</sup> <b>-2CKT</b> = Two circuit, AC only	<b>Blank</b> = 6" EXIT legend <b>-8</b> = 8" EXIT legend (red only) <b>-LP</b> = Panel shipped separately <b>-X</b> = Back box shipped separately			

**Example: WLXN2NRWRL-A-D**

<sup>1</sup>Self-powered only