

Preceptor™ Series

Die-cast aluminum LED exit sign



Construction

- Die-cast aluminum housing
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-box mounting

Special wording panels:

- Available. Contact your sales representative with your design requirements


Power consumption

| Model | AC specs | | DC specs | |
|---------------------------------|----------------------|-------------------|---------------|--------------------|
| AC-only | 120/277VAC, 60 Hz | Less than 2.5W | - | - |
| AC/DC-remote | 120/277VAC, 60 Hz | Less than 2W | 6 to 48VDC | Less than 1.5W |
| Self-powered | 120/277VAC, 60 Hz | Less than 3W | Ni-Cd battery | Min. 90 minutes |
| Self-powered with diagnostic | 120/277VAC, 60 Hz | Less than 2.8W | Ni-Cd battery | Min. 90 minutes |

Housing color



Black



White



Brushed aluminum

How to order

| Housing color | Series/models | # of faces | Legend color | Options |
|--|---|------------------------|-------------------------------|---|
| BA = Black body/aluminum face | P = AC only (120/277 volts) | 1 = Single face | R = Red | Blank = No options |
| WW = White body/white face | P2C1 = Dual AC circuit (2 x 120V) | 2 = Double face | G = Green | DL = Damp location |
| WA = White body/aluminum face | P2C2 = Dual AC circuit (2 x 277V) | | Open face ¹ | FA = Fire alarm activated flasher (Not available with PDN) |
| BB = Black body/black face | PU = 120/277VAC & 6 to 48VDC | | RW = Red on white | FBF = Flasher buzzer + fire alarm activated flasher ² |
| AA = Brushed aluminum body and face | PDN = Self-powered, no Advanced Diagnostics | | GW = Green on white | FL = Flasher ² |
| | PXN = Self-powered Advanced Diagnostics | | | FZ = Flasher buzzer ² |
| | PNEX = Nexus® wired (contact your sales representative) | | | VR = Tamper-proof screws |
| | PNEXP = Nexus®Pro IoT(contact your sales representative) | | | VR1 = Polycarbonate shield with tamper-proof screws |
| | PNEXRF = NEXUS® wireless (contact your sales representative) | | | |

Example: BAPU2R

Electronics

- Optional Advanced Diagnostics
- Optional Nexus®Pro IoT monitoring system
- Optional Nexus® wired and wireless monitoring system
- 120/277 60Hz
- Compatible with Emergi-Lite® Mini Inverters (contact your sales representative for more information)

Approvals


- UL 924 listed
- Damp location optional (50°F to 104°F)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Warranty

- Unit has a five-year limited warranty
- Detailed warranty terms located on page 202 or online at: www.emerigi-lite.com/usa/files/EL_Warranty.pdf

Dimensions

Dimensions are approximate and subject to change.

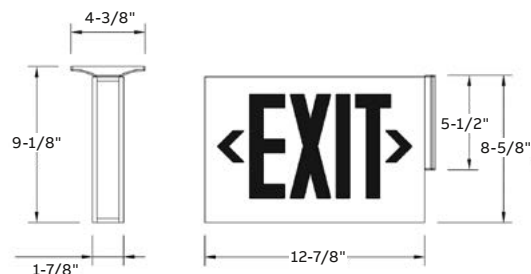

¹Note: Open face required with special wording legends
²PXN, PNEX, PNEXP and PNEXRF models only

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by ABB Inc. is under license. Other trademarks and trade names are those of their respective owners.