

City of Chicago Approved Chicago CCE-LED Series Steel LED exit sign



Modular design accommodates surface or recessed mount with included canopy and trim ring.

Construction

- Constructed of 20-gauge steel with an off-white finish and glass panels
- Single or double face
- White LED light source

Mounting

- Canopy supplied for top or end-mount
- Universal knockout pattern on back plate for wall mount

Electronics

- 120-277 60HZ
- 4.8V long-life, maintenance-free nickel-cadmium rechargeable on self-powered model
- 120 minutes run time in emergency mode

Approvals

- UL listed for damp location 68°F to 122°F (20°C to 50°C)
- Meets UL 924, NFPA 101 Life safety code, NEC, OSHA, local and state codes
- City of Chicago Approved


Warranty

- 3-year full warranty
- Detailed warranty terms located online at: www.emergi-lite.com/usa/files/EL_Warranty.pdf



Dimensions

Dimensions are approximate and subject to change.

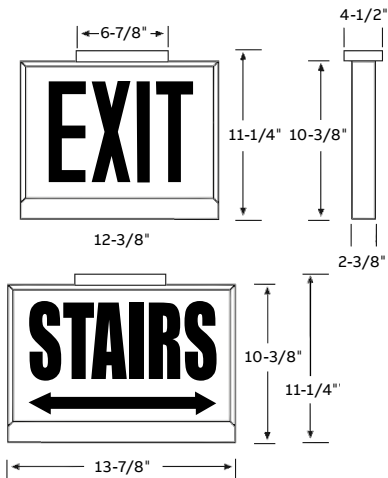

Arrow (chevron) designation

Wordings and chevrons not to scale. For illustration purposes only.



Power consumption

Model	AC specs			DC specs	
CCER	120/277VAC, 60HZ	5W	0.1A/ 0.05A	-	-
CCENR	120/277VAC, 60HZ	5W	0.1A/ 0.05A	Ni-Cd	Minimum 120 minutes

How to order

Series	Legend color	Legend style
CCE= AC only	R= Red	#2A= Single face, STAIRS, no arrow
CCEN= Self-powered		#17A= Double face, STAIRS, no arrow
		#3= Single face, EXIT, no arrow
		#18= Double face, EXIT, no arrow
		#5A= Single face, STAIRS → arrow right
		#6= Single face, EXIT → arrow right
		#8A= Single face, STAIRS ← arrow left
		#9= Single face, ← EXIT arrow left
		#11A= Single face, STAIRS ↔ double arrow
		#23A= Double face, STAIRS ↔ double arrow
		#12= Single face, EXIT ↔ double arrow
		#24= Double face, EXIT ↔ double arrow
		#20A= Double face, STAIRS →, ← STAIRS arrow right/left
		#21= Double face, EXIT →, ← EXIT arrow right/left

Example: CCENR#2A