

New product

N3C Series

Compact wet location combination exit sign



Housing

- Thermoplastic housing
- Standard off-white finish
- Universal faces (2 faceplates, 1 backplate)

Mounting

- End mount
- Wall mount
- Universal J-box mounting
- Canopy included

Type of battery

- NI-MH Battery 3.6V 1500mAH

Lamp head source

- 1W white LED, 100 lumens

Electronics

- 120/277V, 50/60Hz
- Test switch and charge indicator

Approvals


- UL 924 listed
- Wet location -13°F to 104°F (-25°C to 40°C)
- UL 94 V-0 flame rating, fire-resistant
- IP65 rated
- Meets NEMA 3R specifications

Warranty (subject to proper installation and maintenance)

- Unit has a three year limited warranty
- Detailed warranty terms located at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf

Photometric performance

Spacing center-to-center (feet)	
7' mounting height	15' mounting height
28.5'	22.25'

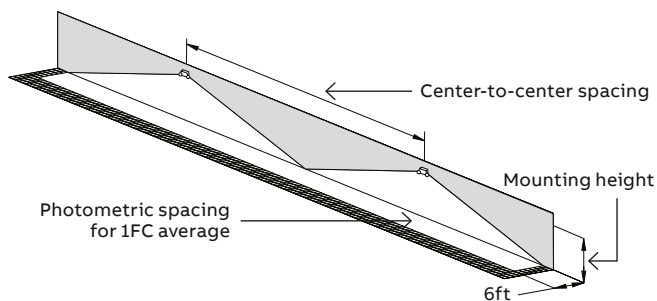


Power consumption

Model	Current (A) / Power (W) 120/277VAC, 60Hz
N3C-2R	0.074/4.5
N3C-2G	0.078/4.5

Dimensions

Dimensions are approximate and subject to change.

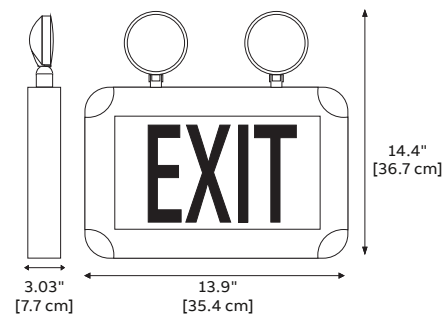

How to order

Series	Lamp	Options
N3C= Combination sign	-2= 2 LED heads	R= Red G= Green
Example: N3C-2R		