

N3E Series

Compact wet location exit sign



Housing

- Thermoplastic housing
- Standard off-white finish
- Universal faces (2 faceplates, 1 backplate)

Mounting

- Ceiling mount
- Wall mount
- End mount
- Universal J-box mounting
- Canopy included

Type of battery

- NI-MH Battery 3.6V 1500mAh

Electronics

- 120/277V, 50/60Hz
- Test switch and charge indicator

Approvals

- UL 924 listed
- Wet location -4°F to 104°F (-20°C to 40°C)
- UL 94 V-0 flame rating, fire-resistant
- IP65 rated
- Meets NEMA 3R specifications

Warranty (subject to proper installation and maintenance)


- Unit has a three year limited warranty
- Detailed warranty terms located at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf

Power consumption

| Model | Current (A) / Power (W) |
|--------|-------------------------|
| | 120/277VAC, 60Hz |
| N3EACR | 0.05/2.8 |
| N3EACG | 0.05/2.8 |
| N3ESPR | 0.065/4.5 |
| N3ESPG | 0.065/4.5 |

Dimensions

Dimensions are approximate and subject to change.

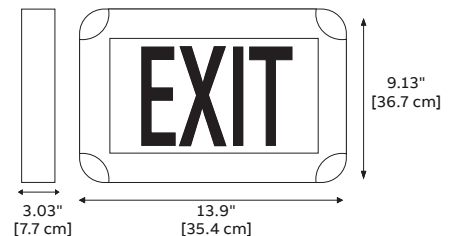

How to order

| Model | Series | Options |
|-----------------|---------------------------------|--------------------|
| N3E= Exit sign | AC= AC only SP= Self-powered | R= Red G= Green |
| Example: N3EACR | | |