



ELMM Series

Mullion mount LED fixture

NEW

Housing

- Extruded aluminum enclosure
- UV-resistant silver powder-coated paint
- Lamp head can be adjusted and fixed at angles from 0° to 180°

Mounting

- Ceiling, surface, and wall mount
- Waterproof junction box included
- Indoor/outdoor; suitable for wet locations
- Maximum mounting height: 10 feet from floor

Electrical

- Dual-function fixture: normally ON or emergency operation (-SP option required for emergency mode, see next page)

• **AC Mode:** 120-277 VAC, 60Hz

• **DC Mode:** 6-24 VDC

• **AC power consumption:** 10W

• **CRI:** 80+

• **Color temperature:** 5000K

• **Performance:**

AC Mode: 1000 lumens

DC Mode: 900 lumens


Approvals

- cULus listed
- IP66 rated
- IK10 rated
- Wet location -22°F to 122°F (-30°C to 50°C)




Dimensions

Dimensions are approximate and subject to change.

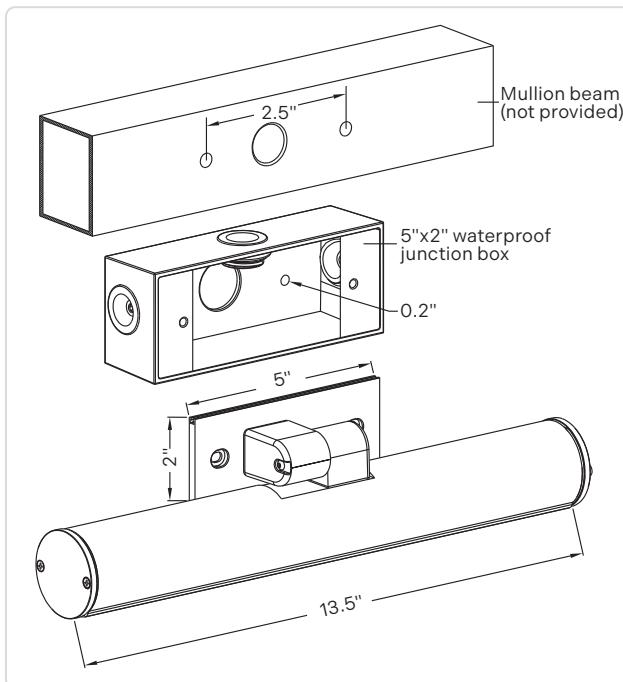

Photometric performance

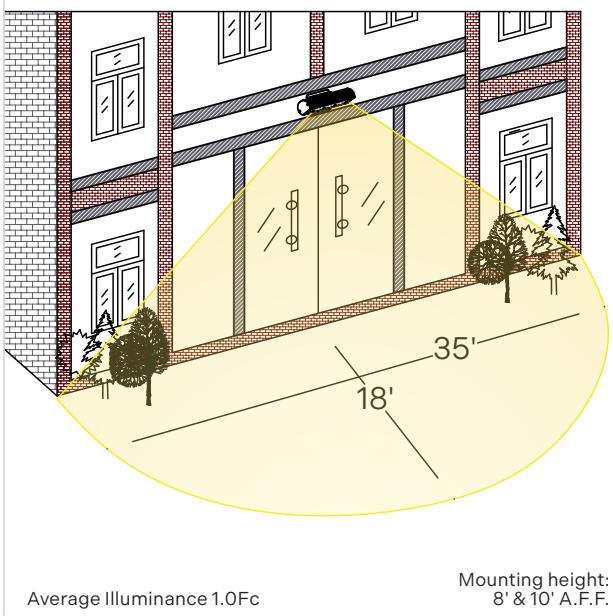

ELMM Series (continued)

Mullion mount LED fixture

NEW



Emergency power supply (included with **-SP** option)

Housing

- Extruded aluminum housing
- UV-resistant silver powder-coated paint
- Button and LED indicator on exterior faceplate for manual testing of the mullion mount in emergency mode

Mounting

- Direct mounting into 3 gang masonry or 3 gang cable box (not included)
- For indoor use only



Electrical

- AC Input:** 120-277 VAC, 60Hz
- DC Output:** 6-24 VDC Max 1.5A
- Overload/short circuit protection
- LiFePO4 battery

Approvals

- UL 924 listed
- Damp location 41°F to 122°F (5°C to 50°C)




Emergency power supply maximum wire length to fixture

AWG wire size	Wire length
18 gauge	20 feet
16 gauge	26 feet

Dimensions

Dimensions are approximate and subject to change.

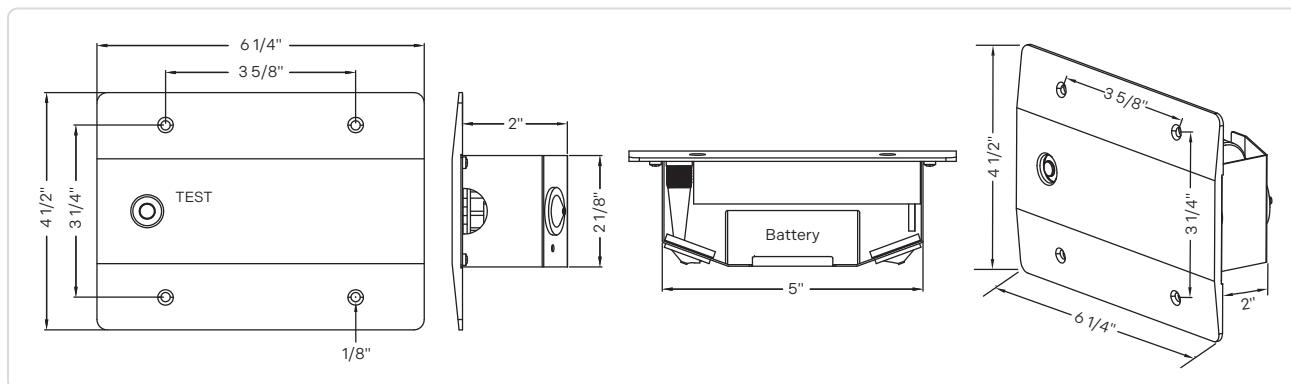

How to order

Series

ELMM= Mullion mount LED fixture

Options

-ACDC= 120-277 VAC 60Hz and 6-24 VDC

-SP= With emergency power supply