

## DLM-2 Series

Thermoplastic housing 6V-12W capacity lead-calcium battery unit



### Housing

- UV stabilized thermoplastic body
- White housing

### Mounting

- Ceiling or wall mount
- Universal J-box mounting

### Lamp Type



- 5.4W high intensity wedge base incandescent lamps

### Electronics

- Pulse plus charger
- Low voltage disconnect
- Automatic brownout protection
- Battery lock-out
- Fused output circuit
- 120/277 60Hz

### Dimensions

Dimensions are approximate and subject to change.

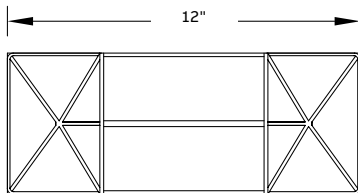

### Sealed maintenance-free battery

- 6V lead calcium battery

### Approvals

- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 94, 5VA flame rated

### Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Power consumption

Series	Batt. type	DC voltage	Battery capacity in watts				Units dual current	
			1-1/2 hrs	2 hrs	3 hrs	4 hrs	Voltage <sup>1</sup>	Max.
DLM-2	Lead-calcium	6V	12	-	-	-	120VAC 277VAC	08A .04A

<sup>1</sup>Stand-by power consumption is 50% lower for lead-calcium batteries.

### Accessories (order as a separate item)

Description	Suffix
Wire guard	WG1-E

### How to order

#### Series

DLM-2= DLM-2 battery-powered emergency lighting

Example: DLM-2