

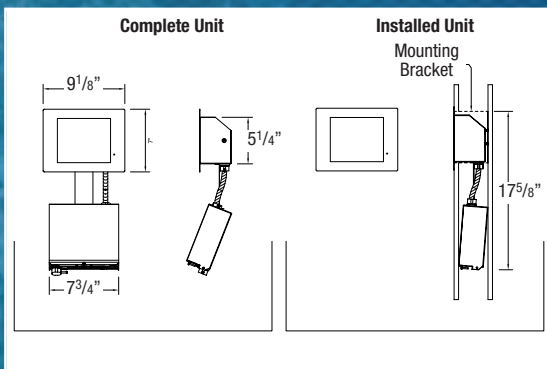


MINI Revelation Series

The Next Generation of concealed emergency lighting: smaller size, full retrofit, impressive illumination of the egress. No back-box is required.

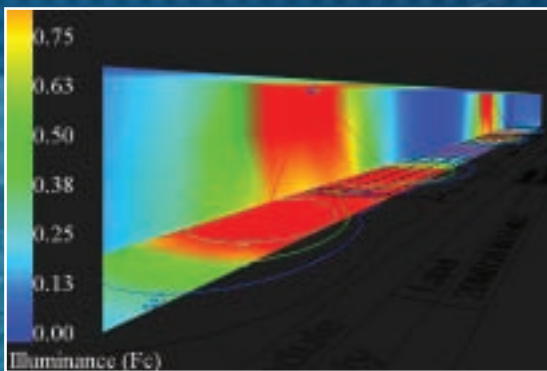

Photometrics

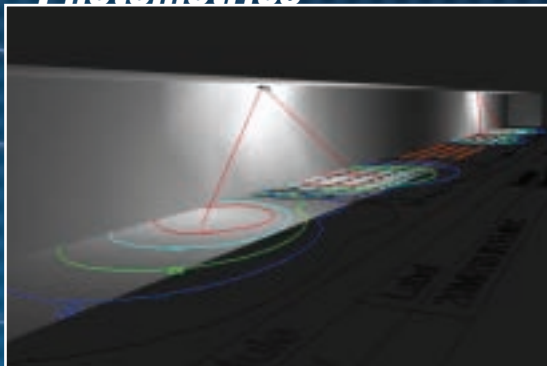

The **Mini-Revelation Series** from **Emergi-Lite** is the next generation of concealed emergency lighting equipment, specially designed for retrofitting in finished walls with a cavity (dry-walls with 4-inch studs). In normal conditions (stand-by) the unit is completely concealed in the wall. In case of power failure the door of the unit flips 180° and exposes the emergency lights (two high-efficiency MR16 lamps) to illuminate the path of egress. At the end of discharge the lights turn off and the door closes by turning another 180° in the same direction, driven by a patent-pending, energy-storage circuit. One self-powered unit equipped with 2 x 40W high-lumen MR16 halogen lamps illuminates a six-foot wide path of egress up to 70 feet in length or 75 feet center-to-center.

Standard Features

- Easy to retrofit in finished walls: the unit slides in through an 8.25 by 5.75 inch hole
- **No back-box needed to pre-install**
- Fully automatic operation: the unit door opens upon loss of AC power and closes when the power is returned or at the end of battery discharge
- Input: Standard AC input 120/277Vac
- Output: 12Vdc 40 W (self-powered model)
- Battery: choice of sealed Lead-Calcium, Nickel-Cadmium or Nickel-Metal Hydride
- Charger: micro-controller driven, temperature compensated, high-precision, fast recharge
- Illumination: equipment with 2 x 20W MR16-H lamps covers 70 to 75 feet of path of egress
- Remote AC unit: direct connection to 120 or 277Vac power generators
- Emergency lights: high-efficacy MR16 halogen lamps; power range from 2x12 to 2x50 Watts
- Warranty: five-year limited warranty on electronic circuitry and motor
- Patent-pending design for ease of installation

www.emergi-lite.com